









Oil & Gas, Marine, Mining & Industrial Engineering - Fabrication - Construction

LPG TRANSPORT TANK




Lintech Duta Pratama has been moving forward on oil and gas products and services. Further expansion to our standard Storage tank for LPG, we also design and deliver complete LPG storage tank for land transport.

We are offering our best experiences to build your LPG land transport tank.

With compliances to standard codes such as ASME and Indonesian Authority regulations for LPG Transport tank, we built our transport tank with Safety in mind in our construction design and application performance.

At Lintech, we combine your low investment cost with world wide quality standard.

Lintech's LPG Transport tanks have the following features:

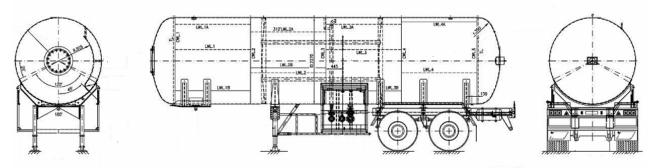

- Available in range of 10, 15, 20 MT capacity
- Code stamp / ref to ASME Section VIII Div 1 Latest Edition & Addenda (Design & Fabrication)
- Material of construction is SA-516 Gr 70 or Equivalent
- Comprehensive test requirements such as Full RT, NDT, Hydro test as per Code
- Certification from Disnaker or Migas and Pertamina
- Welder qualified to Migas certification and ASME certification, and WPS as a welding procedure
- Complete instrumentation according to process line in standard filling station and brand customize
- Dished head typically either to Ellipse or Hemispherical dished head
- Best performance in chassis construction as the best of dynamic fast on roads
- Access ladder for inspection area on above tank
- Customizing in king pin dimension as the slot couple of tractor head
- Landing gear Capacity up to 24 Tons.
- Design in baffle to endure your tank from shocking wave of LPG liquid.
- Lockable the instrument box to protect valve from external damage











Oil & Gas, Marine, Mining & Industrial Engineering - Fabrication - Construction

- Available for 9 tires (10x20x14PR Non-Tubeless Tire)
- Side and rear reflector
- Brake system on each tire application

LPG Transport tank Dimension Information:

All Tanks Dimensions are Approximate as Shown *):

Capacity (Tons) **)	Outside Diameter	Head Type	Overall Length
10	2,000 mm	Ellips 2:1	7,350 mm
15	2,100 mm	Ellips 2:1	9,444 mm
20	2,400 mm	Ellips 2:1 or Hemispherical	10,348 mm

*) Dimension may be to change in range variation since manufacture process

**) Available to request in other specified capacity

For inquiry and further information, Please contact us at:



PT. LINTECH DUTA PRATAMA

"We Offer Integrated Engineering, Procurement, Construction (EPC) and Fabrication (ONSHORE & SEASIDE facilities) for Industry, Mining and Oil & Gas"

Office/Workshop: Graha Lintech – Wira Jatim Industrial Estate – Mastrip70 – Surabaya- Indonesia Seaside Facility: Daendels Street - Paciran Cape Lamongan - 60km from Surabaya- Indonesia

Phone: +62-31-7666891 (Hunting 6 lines) Fax: +62-31-7664604

E-MAIL:admin@lintech.co.id HOMEPAGE: Http://www.Lintech.co.id; Http://www.LSF.CO.ID